





Read the following description of how these cables plug into your system.

- 1. Plug with ground/earth is to be connected to the host component.
- 2. The contact without the ground/earth connection is to be connected to the sending component.
- 3.
 - Connected to ground/earth point. (See also the connection of signal cable on page 6 and 7.)

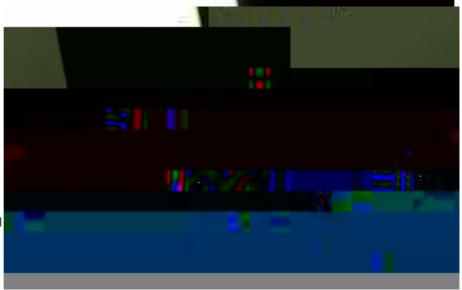


www.entreq.com 5

Positive cord (+)

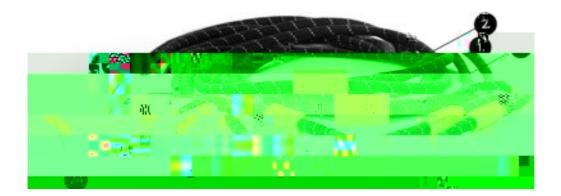



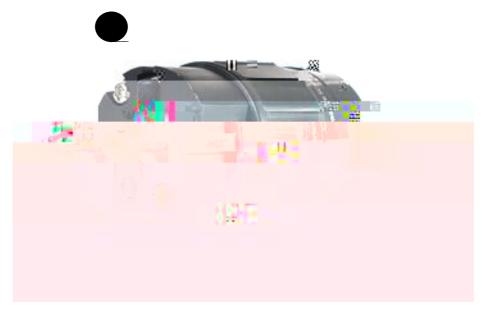



Locate the phase in the main connector Without going into to detail of how our EEDS system works, you have to know which 9eiste the phaso in thor

=3##&%"+%0,

During transport the copper sand in the vibb eaters may be compressed. We recommend that the vibb eaters are turned upside down while shaking them a little, to get back to their original form.

The vibb eaters are supplied with two black clothss &qc&mau71 comm the

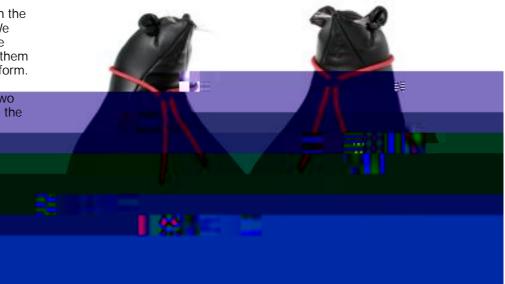




The feet should be placed with the soft leather side up against your equipment or speakers.

Place one foot under the transformer and the other two so that the device is stable.

li9r. Goent oDVD, be plaste foor

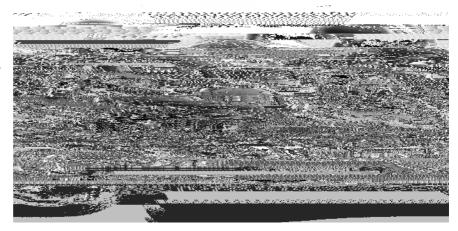

Application AC Wraps are available in two models, one model with e]IYdZYjk`Yf\`kYf\`bookf_\$Yf\`Y`nYjaYfI'I`YI'ak`gfodj` kYf\%podj\&

By applying AC wraps at various locations along the cable the sound will change. In addition to the placement